



## UNA-CLAD™ SERIES 100 Column Cover

**DESCRIPTION:**

The Series 100 caulk or trim in-fill joint column covers are available in round, square, rectangular, and oblong configurations. Convert unfinished concrete columns, I-beams, or corner conditions to enhance the appearance of the building.

**METHOD OF APPLICATION:**

1. Attachment of columns to a system of vertical channels or angles which are connected to an unfinished column element.
2. First attach long flange column side the framing, then install opposite column side in place over top of the other half.

Note: Follow approved shop drawing installation details.


**STORAGE:**

1. Store in a well ventilated, dry place where no moisture can contact the panels. Moisture (from rain, snow, condensation, etc.) trapped between layers of material may cause water stains or white rust, which can affect the service life of the material and will detract from its appearance.
2. If outdoor storage cannot be avoided, protect the panels with a ventilated canvas or waterproof paper cover. Do not use plastic, which can cause condensation. Keep the material off the ground in an inclined position with an insulator such as wood, or keep panels crated. Protective film may degrade or become brittle with exposure to direct sunlight.

**PRECAUTIONS:**

1. Oil canning is not a cause for rejection.
2. Exercise caution when lifting, moving, transporting, storing or handling Firestone metal to avoid possible physical damage.
3. Immediately remove protective film after installation.

This sheet is meant only to highlight Firestone's products and specifications. Information subject to change without notice. Firestone takes responsibility for furnishing quality materials, which meet Firestone's published product specification. As neither Firestone itself nor its representatives practice architecture, Firestone offers no opinion on, and expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure, or its ability to support a planned installation properly, the Owner should obtain opinions of competent structural engineers before proceeding. Firestone accepts no liability for any structural failure or for resultant damages, and no Firestone representative is authorized to vary the disclaimer.

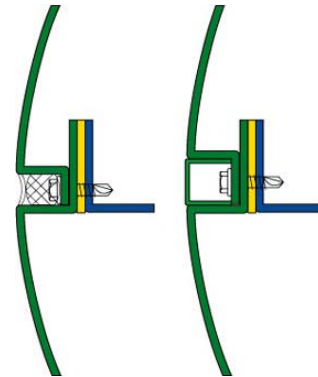

### PRODUCT DATA

<b>Panel Type:</b>	Column Cover with caulk joint or trim in-fill joint.
<b>Material Options:</b>	.080, .090, .125, .190 aluminum 3-mm, 4-mm, 6-mm composite natural metals
<b>Color:</b>	Choose from 31 FSMP standard colors or custom color.
<b>Finish:</b>	Kynar 500®/Hylar 5000® high performance fluorocarbon resinous coatings
<b>Optional Finish:</b>	Anodized Natural Metals
<b>Sealant:</b>	Perimeter Sealant Dow 756 with primer or Momentive SCS2000 with primer
<b>Clip:</b>	N/A
<b>Substrate:</b>	Angle Attachment
<b>Standard Panel Surface:</b>	Smooth

### PANEL SIZE

<b>Maximum Column Length:</b>	16'
<b>Minimum Column Length:</b>	6"
<b>Minimum Column Diameter:</b>	12"

**Firestone Metal Products Company, LLC**  
1001 Lund Blvd. Anoka, MN 55303  
Phone: 763-576-9595 • Fax: 763-576-9596  
Toll Free: 800-426-7737  
<http://www.unaclad.com>