



UNA-CLAD UC-601

CORRUGATED PANEL FOR COMMERCIAL-INDUSTRIAL
METAL WALL AND ROOF CLADDING

DESCRIPTION:

Firestone UNA-CLAD UC-601 Wall Panel is a factory formed corrugated commercial-industrial metal wall and roof panel that provides a traditional metal panel appearance. The UC-601 wall panel is mechanically fastened with exposed fasteners and installed in a nonsequential pattern. The panel is available in a wide variety of materials and finishes including Kynar 500®/Hylar 5000™ pre-finished G-90 Galvanized Steel and Aluminum, bare Galvanized, Acrylume, and Zinc.

METHOD OF APPLICATION:


1. Firestone UC-601 panels may be installed in a nonsequential pattern over a solid substrate or open framing.
2. Application of a Firestone approved underlayment prior to panel installation over a solid substrate is recommended.

STORAGE:

1. Firestone metal panels should be stored in a well ventilated, dry place where no moisture can contact them. Moisture (from rain, snow, condensation, etc.) trapped between layers of material may cause water stains or white rust, which can affect the service life of the material and will detract from its appearance.
2. If outdoor storage cannot be avoided, protect the panels with a ventilated canvas or waterproof paper cover. Do not use plastic, which can cause condensation. Keep the material off the ground in an inclined position with an insulator such as wood. Protective film may degrade or become brittle with long term exposure to direct sunlight.

PRECAUTIONS:

1. Oil canning is not a cause for rejection.
2. Sealant for end laps and lap joints shall be non-drying, non-toxic, and non-shrinking with a serviceable temperature of -60 °F to 212 °F. (-51 to 100 °C)
3. Quality, long-life butyl sealants work best as a gasket sandwiched between two pieces of metal. Non-acetic cured silicone color matching sealants are recommended when voids must be filled. Sealants are not a substitute for proper assembly and workmanship.
4. Exercise caution when lifting, moving, transporting, storing or handling Firestone metal to avoid possible physical damage.
5. Refer to Material Safety Data Sheets (MSDS) for safety information.
6. Immediately remove protective film after installation.
7. Zinc must be worked at 50 °F (10 °C) and rising.

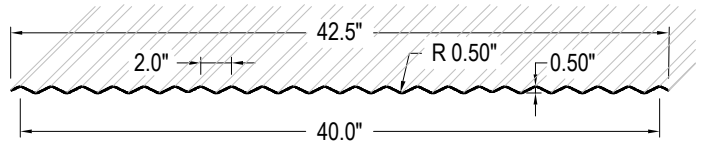

PRODUCT DATA

Panel Type:	Commercial-Industrial
Joint Design:	Over Lapping
Tapered Panels:	No
Radiused:	No
Standard Panel Surface:	Smooth
Optional Panel Surface:	Stucco Embossed
Substrate:	Solid Substrate or Open Framing

PANEL SIZE

Panel Width:	42.5" (1,079 mm)
	40.0" (1,016 mm) Net Coverage
Min. Panel Length:	36" (914.4 mm)
Max. Panel Length:	480" (12,190 mm)

†Net coverage is reduced when fabricated from zinc.

TECHNICAL INFORMATION

Structural Performance:	ASTM E 330 ASTM E1592
Air Infiltration:	ASTM E 283 ASTM E 1680
Static Water Penetration:	ASTM E 331 ASTM E 1646
Dynamic Water Penetration:	AAMA 501
Fire Rating:	UL Class A Rated Assemblies UL 263, UL 790
Hail Rating:	Class 4, UL 2218

Note: Testing not applicable for all substrates, materials, and dimensions. All systems with test listings must be installed in accordance with the assembly tested. Refer to Firestone Website for available code listings.



UNA-CLAD UC-601

CORRUGATED PANEL FOR COMMERCIAL-INDUSTRIAL
METAL WALL AND ROOF CLADDING

MATERIAL & THICKNESS	METAL SPECIFICATION	AVAILABLE FINISHES
GALVANIZED STEEL 26 ga. (0.48 mm) 24 ga. (0.64 mm)	Base Metal: AISA-G90 Galvanized steel Minimum Yield: 33 to 45 KSI (227 to 310 MPa) Thermal Expansion: 06.7×10^{-6} in/in/F° ($13.9 \text{ m/m.K} \times 10^{-6}$) Mod. Of Elasticity: 29.0×10^6 x KSI (200 GPa)	Kynar 500®/Hylar 5000® Unpainted G90
GALVALUME® STEEL 26 ga. (0.48mm) 24 ga. (0.64mm)	Base Metal: AZ-55 Hot Dipped Galvalume Minimum Yield: 50 KSI (345 MPa) Thermal Expansion: 06.7×10^{-6} in/in/F° ($13.9 \text{ m/m.K} \times 10^{-6}$) Mod. Of Elasticity: 29.0×10^6 x KSI (200 GPa)	Acrylume – Clear Acrylic Coated
ZINC 0.028" (0.7 mm)	RHEINZINK®: Electrolytic high-grade, 99.995% pure, fine zinc (DIN EN 1179) titanium copper alloy. certified according to DIN ISO 9001: 1994 Thermal Expansion: 2.2 mm/m x 100K ($16.5" \times 10^{-6}$ in/in/F)	Shiny Preweathered Blue-Gray Graphite Gray

*Note: Consult current UNA-CLAD Color Selection Guide
 Custom color services available upon request
 Consult current base metal Coil & Flatsheet T.I.S. for additional information on the base metal and coating.
 Not all materials and thicknesses are available from all locations. Contact Firestone Metal Products for additional information.*

Manufacturing Location: Anoka, MN

This sheet is meant only to highlight Firestone's products and specifications. Information is subject to change without notice. Firestone takes responsibility for furnishing quality materials, which meet Firestone's published product specification. As neither Firestone itself nor its representatives practice architecture, Firestone offers no opinion on, and expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure, or its ability to support a planned installation properly, the Owner should obtain opinions of competent structural engineers before proceeding. Firestone accepts no liability for any structural failure or for resultant damages, and no Firestone Representative is authorized to vary this disclaimer.

Firestone Metal Products
 1001 Lund Blvd • Anoka, MN 55303
 800-428-7737 • 763-576-9595 • FAX 763-576-9596
www.firestonemetal.com

S723-RFS-279MP