

### Built to Outlast

#### CORRUGATED INSULATED METAL WALL PANEL FEATURES

**Exterior Profile:** 7.2" on-center rib pattern, 1 1/2" deep

**Interior Profile:** Sonoma nominal 1/8" deep; Sonoma Light nominal 1/16" deep

**Panel Core:** Foamed-in-place, zero ozone depleting (zero ODP) polyurethane, Factory Mutual Class I approval with no height restrictions

**Thermal Values:** K-factor, Btu in/ft<sup>2</sup> hr; °F @ 75°F (24°C) mean core temp = 0.140; K-factor, Btu in/ft<sup>2</sup> hr; °F @ 40°F (4°C) mean core temp = 0.126

**Module Width:** Nominal 36"

**Panel Thickness:** Nominal overall 2 1/2", 3", 4", 5", 6"

**Panel Lengths:** 8'-0" to 50'-0"

**Exterior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26, 24, and 22 ga.

**Interior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26, 24, and 22 ga.

**Panel Joint:** Offset double tongue and groove with extended metal shelf for positive face fastening

**Fastening:** Fastener & Clip concealed in the side joint

**Application:** Vertical applications

#### FINISHES & COLORS


A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

**Finish Warranty:** Available 20 year warranty, contact your Sales Rep for complete details.

# Corrugated

## Architectural Insulated Metal Panel

The UNA•FOAM™ Corrugated insulated metal wall panels combine a traditional 7.2 rib panel design with a polyurethane foam core. This widely used profile is now available with exceptional insulating properties in various thicknesses.

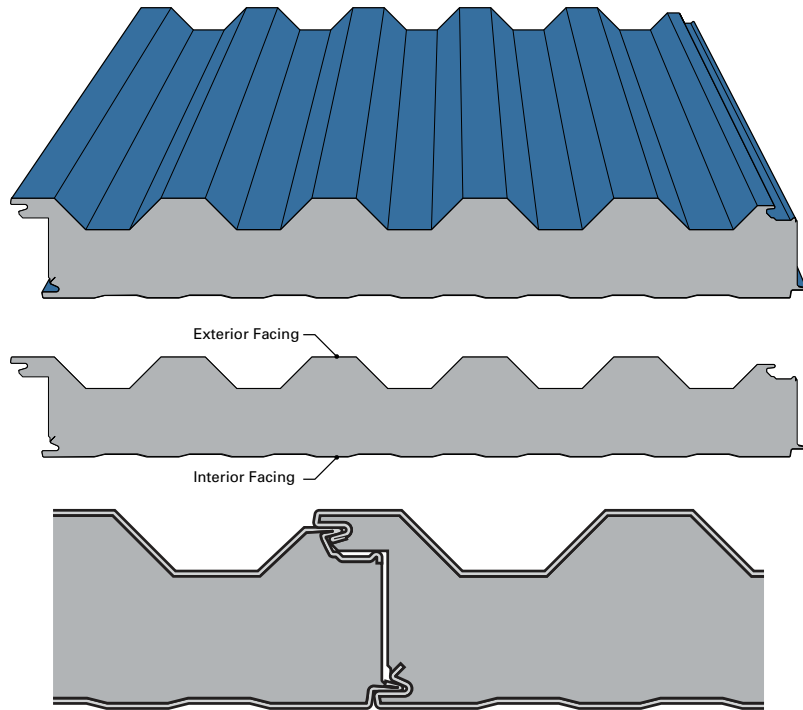

From Firestone  
The Industry Leader

**Firestone**  
METAL PRODUCTS

800-426-7737  
www.UNACLAD.com

To locate your local Sales Representative,  
please visit [www.UNACLAD.com](http://www.UNACLAD.com)

**NOBODY COVERS  
YOU BETTER™**