

STRIATED INSULATED METAL WALL PANEL FEATURES

Exterior Profile: Longitudinal Striations, nominal 1/32" deep

Interior Profile: Sonoma nominal 1/8" deep; Sonoma Light nominal 1/16" deep

Panel Core: Foamed-in-place, zero ozone depleting (zero ODP) polyurethane, Factory Mutual Class I approval with no height restrictions

Thermal Values: K-factor, Btu in/ft² hr; °F @ 75°F (24°C) mean core temp = 0.140; K-factor, Btu in/ft² hr; °F @ 40°F (4°C) mean core temp = 0.126

Module Width: 30", 36", 42"

Panel Thickness: 2", 2 1/2", 3" (2 3/4" thickness also available)

Panel Lengths: 8'-0" to 40'-0" for the 30" & 36" widths, 8'-0" to 32'-0" for the 42" width

Exterior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 24 and 22 ga.

Interior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26, 24, and 22 ga.

Panel Joint: Offset double tongue and groove with extended metal shelf for positive face fastening

Fastening: Fastener and Clip concealed in the side joint


Application: Vertical applications

FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

Finish Warranty: Available 20 year warranty, contact your Sales Rep for complete details.

UNA•FOAM™ **Striated insulated metal wall panels** are an attractive and economical alternative to typical flat wall panels. The exterior face is lightly profiled with narrow longitudinal striations and exhibits a virtual flat appearance from a short distance away. The Striated wall panel is an exceptional value combining the aesthetics of a flat wall panel and high insulation ratings of a polyurethane core.

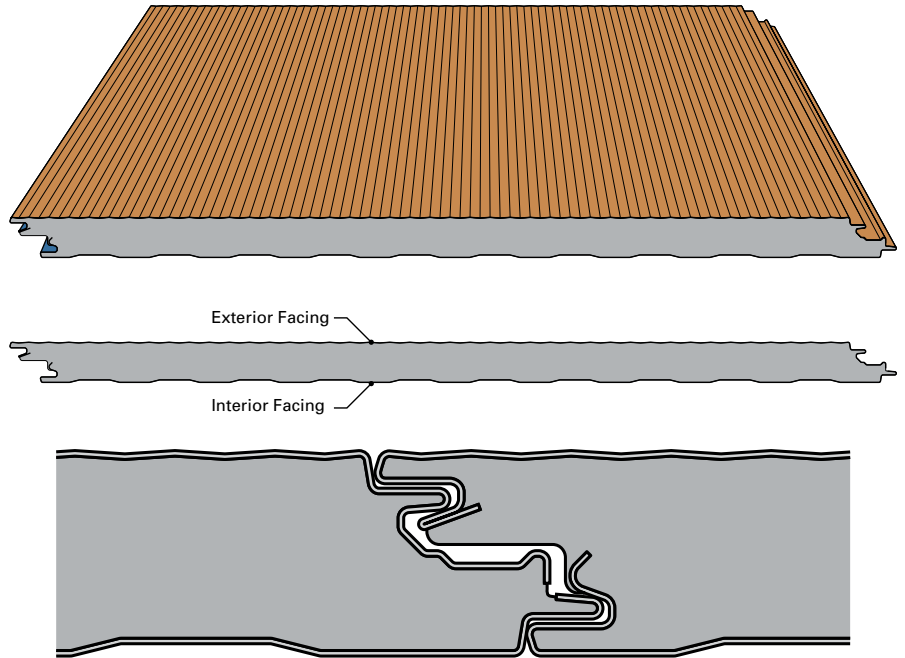

From Firestone
The Industry Leader

Firestone
METAL PRODUCTS

800-426-7737
www.UNACLAD.com

To locate your local Sales Representative,
please visit www.UNACLAD.com

**NOBODY COVERS
YOU BETTER™**