

### SOUTHWEST INSULATED METAL WALL PANEL FEATURES

**Exterior Profile:** Flat profile with heavy stucco texture

**Interior Profile:** Sonoma nominal 1/8" deep; Sonoma Light nominal 1/16" deep

**Panel Core:** Foamed-in-place, zero ozone depleting (zero ODP) polyurethane, Factory Mutual Class I approval with no height restrictions

**Thermal Values:** K-factor, Btu in/ft<sup>2</sup> hr; °F @ 75°F (24°C) mean core temp = 0.140; K-factor, Btu in/ft<sup>2</sup> hr; °F @ 40°F (4°C) mean core temp = 0.126

**Module Width:** 42"

**Panel Thickness:** 2", 2 1/2", 3", 4" (2 3/4" thickness also available)

**Panel Lengths:** 8'-0" to 40'-0"

**Exterior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26, 24, and 22 ga.

**Interior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26, 24, and 22 ga.

**Panel Joint:** Offset double tongue and groove with extended metal shelf for positive face fastening

**Fastening:** Fastener & Clip concealed in the side joint

**Application:** Vertical applications


### FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

**Finish Warranty:** Available 20 year warranty, contact your Sales Rep for complete details.

## Architectural Insulated Metal Panel

UNA•FOAM™ Southwest insulated metal wall panels have a flat exterior profile with a heavy embossed, stucco texture that mimics the look of a masonry stucco finish.

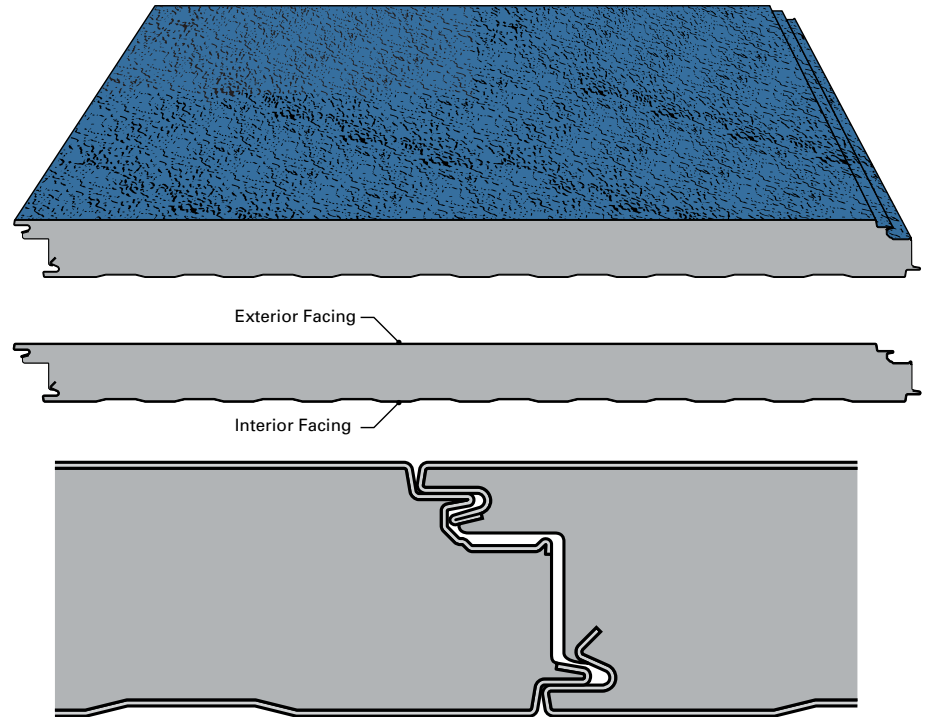

From Firestone  
The Industry Leader

**Firestone**  
METAL PRODUCTS

800-426-7737  
www.UNACLAD.com

To locate your local Sales Representative,  
please visit [www.UNACLAD.com](http://www.UNACLAD.com)

**NOBODY COVERS  
YOU BETTER™**